

Perfect comfort with two lounge seats

Supreme comfort with two lounge seats, wide or compact, with differentiated hydromassage and FX seat with Hydrosoothe[™] pillow and IR and Red Light.











IR and Red Light technology

Waterfall with Lights Headrest



Comfort

(optional)

CLEARRAY

Active Oxygen®

Soft and thin headrest

Illuminated cup holders

Bluewave[™] Stereo System

Underwater LED multicolor light

External corner lighting (white LED)



Underwater LED multicolor light

SmartTub[®]

Jacuzzi[®] Hydromassage

2 IR and Red Light 44 PowerPro[®] jets Waterfall with lights FX-IR Seat

Headrest with hydromassage HydroSoothe™

Water care

CLEARRAY Active Oxygen™ System 4-stage filtration

SHELL CABINET COVER ACRYLIC PROFINISH™ PROLAST™ COLORS MATERIALS **FINISHES** Silver Pearl Midnight Black Platinum Porcelain Brushed Smoked (white) Grey Ebony Configure ACCESSORIES SmartTub[®] your Wireless Sensor Kit Hot Tub

Step

Cover lifter manual



Sensor Kit

SmartTub® Wireless

Drain®

Stereo System (optional)

Quality Construction Fully insulated ProPolymer[™] base

Hot Tub Management


Touch Screen Controls SmartTub[®] Quick Drain®





HYDROMASSAGE BODY COVERAGE AND SEAT DEPTH



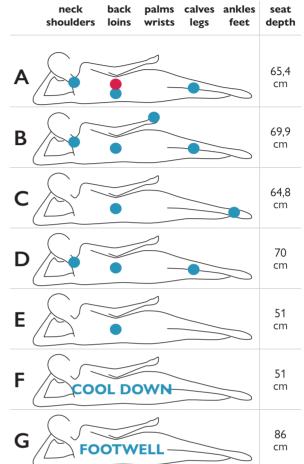

FEATURES

FEATORES			
Dry weight	347 kg	Floor load	551 kg/m²
Filled weight (Hot Tub volume)	2.050 kg	Water capacity (average fill)	1.325 litres
Water capacity (Hot Tub volume)	1.703 litres		
Electronic control	Touch screen controls, programmable temperature, filtration and heat cycles		
Pompa 1 - 2	50 Hz – 1-Speed	Circulation pump	Yes, 8-Hour
Massage selectors	2	Air controls	4 - On/Off rocker style
Water management system	Two 60 ft ² Filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY Active Oxygen [®] water purification system		
LED Lighting	Underwater multicolor light, waterfall with lights, Illuminated cup holders, 2 HydroSoothe™ headrest lights and external corner lighting (white LED)		
Headrests	One independent flow rate (on or off) adjustment; powered by the circulation pump		
Maximum current absorbed	6,7 kW with electric heaters + pumps. Alternative consumption 3,9 kW: by activating a pump, the electric heater switches off.		